



PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Arne Karlsson et al.
Serial No.: 10/758,174
Filed: January 15, 2004
Title: "COOLING APPARATUS AND METHOD"
Docket No.: 36326

LETTER


Commissioner of Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Sir/Madam:

Enclosed is a certified copy of Swedish Patent Application No. 0303228-1, filed December 1, 2003; the priority of which has been claimed in the above-identified application.

Respectfully submitted,

PEARNE & GORDON LLP

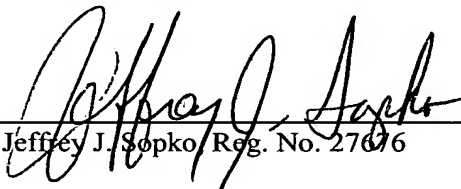
Jeffrey J. Sopko, Reg. No. 27676

1801 East 9th Street
Suite 1200
Cleveland, Ohio 44114-3108
(216) 579-1700

January 27, 2004

I hereby certify that this correspondence is being deposited with the United States Postal Service as first class mail in an envelope addressed to: Commissioner of Patents, P.O. Box 1450, Alexandria, Va. 22313-1450 on the date indicated below.

Jeffrey J. Sopko/
Name of Attorney for Applicant(s)

01/27/2004
Date


Signature of Attorney

PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen

Intyg Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.



(71) Sökande Dometic Sweden AB, Solna SE
Applicant (s)

(21) Patentansökningsnummer 0303228-1
Patent application number

(86) Ingivningsdatum 2003-12-01
Date of filing

Stockholm, 2003-12-12

För Patent- och registreringsverket
For the Patent- and Registration Office

Hjärdís Segerlund

Avgift
Fee 170:-

COOLING APPARATUS AND METHOD

TECHNICAL FIELD

The present invention relates to an apparatus for effective cooling of an absorption refrigerator comprising a cooling compartment and a freezing compartment and a method therefore. More specifically the present invention relates to an apparatus for effective cooling of an absorption refrigerator comprising a cooling compartment and a freezing compartment driven by one absorption cooler.

BACKGROUND OF THE INVENTION

The present invention relates to an absorption refrigerator including; a cabinet having outer walls and at least one door encasing a low temperature storage compartment and a higher temperature storage compartment, said compartments being separated by a partition wall, and an absorption refrigerating system including an evaporator tube in which a refrigeration medium flows from an upstream end to a downstream end of the evaporator tube, and which evaporator tube comprises a first tube section which is arranged to absorb heat from the low temperature compartment, a second tube section, which is arranged to absorb heat from the higher temperature compartment, wherein the first and second tube sections are connected in series and the first tube section is arranged upstream of the second tube section.

Such absorption refrigerators are commonly used e.g. in recreation vehicles, mobile homes or at homes where AC power supply is not available at all times.

Normally, at the prior art refrigerators of this type, the lower temperature compartment is a freezer, which at modern absorption refrigerators normally is maintained at -18°C .

5 The low temperature compartment is occasionally denoted freezer or freezer compartment, the higher temperature compartment is occasionally denoted fridge or fridge compartment and the cabinet, comprising the freezer and fridge compartments are occasionally denoted refrigerator, absorption refrigerator or refrigerator cabinet.

10 The freezer may also accommodate a device for fabrication of ice, often referred to as the ice-maker. The ice maker may in it's simplest form be an ice-cube container but it may also comprise more sophisticated devices with means for automatic water supply and ice harvesting means including mechanical
15 members and electrical heating elements.

The higher temperature compartment is normally maintained at around $+5^{\circ}\text{C}$ and could be referred to as a fridge compartment.

The evaporator tube may include an upstream tube section, which is dedicated for cooling the ice-maker, if present.
20 Downstream of this ice-maker tube section and in direct connection to its downstream end, an intermediate tube section is arranged for cooling the freezer. Downstream of the freezer section, a downstream fridge section of the evaporator tube is arranged for cooling the higher temperature fridge
25 compartment. At some applications both the freezer and the ice-maker are cooled together by one single evaporator tube section which is arranged upstream of the fridge tube section.

The evaporator may be provided with various types of heat conducting members for conducting heat from the items to be
30 cooled, i.e. the freezer and fridge compartments and the ice

maker, to the respective evaporator tube sections. As an example, the ice-maker section of the evaporator may be provided with a heat conducting plate, which is arranged to support the ice-cube container and which conducts heat from the container to the ice-maker section of the evaporator. The freezer and fridge sections may be provided with flanges or baffles, which conduct heat from the air in the freezer and fridge compartments to the evaporator freezer and fridge section respectively.

10 The evaporator reaches its lowest evaporation temperature at the upstream end. Downstream of the upstream end, the evaporation temperature rises gradually when the cooling medium in the evaporator tub absorbs heat from the ice-maker, freezer compartment and fridge compartment.

15 A problem at this known type of absorption refrigerator is that it is difficult to achieve a high enough cooling power of the refrigeration system to maintain the freezer compartment at the low temperature which is desired. As mentioned above, it is often desired to keep the temperature in the freezer

20 compartment as low as approximately -18°C . The total cooling power of the absorption refrigerating apparatus is, among other factors such as ambient temperature, limited by the heat transfer capacity of the evaporator, which in turn depends on the total length of the evaporator tube. This length in turn, is limited by the dimensions of the refrigerator cabinet and by the fact that the evaporator tube needs to be designed with a downward inclination over its entire length, from the upstream to the downstream end.

25
30 When the absorption refrigerator is installed in an environment of relatively low temperature, for example 10°C , the proportion of operative phases of the absorption

refrigerating system is reduced, resulting in an undesirable decrease in the performance of the freezer compartment.

The temperature in the freezer and fridge compartment are normally controlled by turning the refrigerating system on, when lower temperatures are required, and off, when the required temperatures has been achieved, respectively. To be able to achieve the required cooling level in the freezer compartment the refrigeration system, including the boiler, will have to be turned on more often than would be required to achieve the required temperature in the fridge compartment. This will in turn result in a lower temperature in the fridge compartment than preferable, which of course could have a detrimental effect on food stored in the fridge compartment.

At the upstream end of the evaporator tube, the evaporation temperature of the refrigeration medium is normally approximately -30°C . During manufacturing of ice, i.e. during freezing of water in the ice-maker, the ice-maker section of the evaporator absorbs heat from the ice-maker. This heat absorption rises the evaporation temperature of the refrigeration medium so that it, at the entrance of the freezer section of the evaporator tube, is approximately -24°C and at the exit approximately -20°C . Thus, during manufacturing of ice, the average driving temperature difference between the desired freezer temperature and the evaporation temperature of the refrigeration medium would then be only about 2°C . Such a small driving temperature difference enhances the problems described above.

DE 196 34 687 A1 discloses a refrigerator using a heater in a fridge compartment to raise the temperature in the fridge compartment, when the requirements for lower temperature in the freezer compartments also lowers the temperature in the

fridge compartment. This will of course require extra power to drive the heater element and would be a problem, which is accentuated in the case where the refrigerator, at least partly and occasionally is operated using batteries.

5 SUMMARY OF THE INVENTION

It is a main object of the present invention to provide such apparatus and method that at least alleviate the above problems.

It is in this respect a particular object of the invention to
10 provide such apparatus and method that achieves preferred temperature ranges both in a fridge compartment and a freezer compartment in an absorption refrigerator.

It is still a further object of the invention to provide such
15 apparatus and method that achieves the above objects during operation conditions requiring reduced power consumption.

These objects among others are, according to a first aspect of the present invention, attained by an absorption refrigerator including a cabinet having outer walls and at least one door encasing a low temperature storage compartment and a higher
20 temperature storage compartment, said compartments being separated by a partition wall, an absorption refrigerating system including an evaporator tube in which a refrigeration medium flows from an upstream end to a downstream end of the evaporator tube, and which evaporator tube comprises a first
25 tube section which is arranged to absorb heat from the low temperature compartment, and at least a second tube section, which is arranged to absorb heat from the higher temperature compartment, a battery arranged to supply power to electronic equipment in said absorption refrigerating system, a control
30 system arranged to control start and stop of said absorption refrigerating system to control the temperature in at least

said higher temperature storage compartment to be within a specified temperature range, and a heater arranged in said higher temperature storage compartment provided to apply heat to said higher temperature compartment. The refrigerator is characterized in that said control system comprises a sensor arranged to detect if said battery is currently charged or if AC-power is available, and that said control system is arranged to set freezer control values to a first set of freezer control values if said battery is charged or if AC-power is available and to a second set of freezer control values if said battery is not charged or if AC-power is not available, where at least one of the values in said second set of freezer control values is higher than both values in said first set of freezer control values.

The above objects among others are, according to a second aspect of the present invention, attained by a method for controlling the temperature in an absorption refrigerator comprising the steps of: detecting if said battery is currently charged or if AC-power is available, setting freezer control values to a first set of freezer control values if said battery is charged or if AC-power is available, and setting said freezer control values to a second set of freezer control values if said battery is not charged or if AC-power is not available, wherein at least one of the values in said second set of freezer control values is higher than both values in said first set of freezer control values.

By changing the freezer control values depending on if the battery is currently charged or if AC-power is available it is possible to save DC-power when limited power is available.

According to a preferred embodiment said freezer control values are provided to control start and/or stop of said absorption refrigerating system.

By controlling start and/or stop of the cooler in dependence of the freezer control values better control of the temperature in the freezer and in the fridge is achieved.

5 According to another preferred embodiment said freezer control values are provided to control application of heat in said higher temperature compartment. According to an alternative the control thresholds for controlling the heater may be separate from the freezer control values.

10 By controlling start and/or stop of the heater in dependence of the freezer control values better control of the temperature in the freezer and in the fridge is achieved.

According to a preferred embodiment said freezer control values comprises a higher freezer temperature threshold and a lower freezer temperature threshold.

15 These higher and lower freezer temperature thresholds define a temperature range for control of the start and/or stop of, for instance the cooler or heater.

20 According to a preferred embodiment said control system is provided to control the temperature in said higher and lower temperature compartments by: starting said absorption refrigerating system if either the temperature in said higher temperature compartment is above said specified temperature range or the temperature in said lower temperature compartment is above said higher freezer temperature threshold, and
25 stopping said absorption refrigerating system if both the temperature in said higher temperature compartment is below said specified temperature range, and the temperature in said lower temperature compartment is below said lower freezer temperature threshold.

If the temperature in both compartments are allowed into the control mechanism it is possible to achieve better temperature characteristics in the respective compartments.

According to a preferred embodiment said control system is
5 provided to control the temperature in said higher temperature storage compartment by starting said absorption refrigerating system if the temperature in said higher temperature storage department is above said specified temperature range and stop
10 said absorption refrigerating system if the temperature in said higher temperature storage department is below said specified temperature range.

Thus it is possible to control start and stop of the cooler only in dependence of the temperature in the fridge.

According to a preferred embodiment said control system is
15 provided to apply heat to said higher temperature compartment if the temperature in said higher temperature compartment is below a first specified temperature and stop application of heat if the temperature in said higher temperature compartment rises above a second specified temperature.

20 Since the system only has one cooling unit it may occasionally be so that the freezer requires the cooler to be started or to continue to run, while the temperature in the fridge should not be allowed to be lower. In this case the heater is used to apply heat in the fridge to raise, or at least to maintain,
25 the temperature therein.

According to a preferred embodiment said control system is
provided to stop application of heat to said higher
temperature compartment if the temperature in said lower
temperature compartment is below said lower freezer
30 temperature threshold.

If the temperature in the freezer is below the lower freezer threshold, application of heat in the fridge should be stopped so that the temperature in the fridge is allowed to drop below the lower fridge threshold, when the warming power of the heater is greater than the cooling power in the fridge. Thereupon, the cooler is stopped.

By operating a heater arranged in the high temperature compartment in dependence of the temperature in the freezer compartment and/or the fridge compartment the temperature in the two different compartments can be kept within defined limits.

According to a preferred embodiment the battery powers the heater, fans, control system etc. as well as other RV appliances.

According to another preferred embodiment the heater is also used for defrosting purposes. Thus it is not necessary to provide a specific heater for the purpose of defrosting.

According to a preferred embodiment said first set of freezer control values comprises a higher freezer temperature threshold in the range of -14° to -18° Celsius, preferably -16° Celsius, and a lower freezer temperature threshold in the range of -20° to -16° Celsius, preferably -18° Celsius, and - said second set of freezer control values comprises a higher freezer temperature threshold in the range of -10° to -14° Celsius, preferably -12° Celsius, and a lower freezer temperature threshold in the range of -16° to -12° Celsius, preferably -14° Celsius.

Since only one cooler is used it is not possible to independently control the temperature in both the fridge and the freezer by simply starting and stopping the cooler. Also,

the goods in the fridge is more sensitive to variations than the goods in the freezer. Thus, it is preferably to regulate the start and stop of the cooler depending on the temperature in the fridge compartment, rather than on the temperature in the freezer compartment. However, as is stated above, it is also possible to control on both compartments.

The above objects among others are, according to a third aspect of the present invention, attained by a method for controlling the temperature in an absorption refrigerator, wherein said refrigerator includes a cabinet having outer walls and at least one door encasing a low temperature storage compartment and a higher temperature storage compartment, said compartments being separated by a partition wall, an absorption refrigerating system including an evaporator tube in which a refrigeration medium flows from an upstream end to a downstream end of the evaporator tube, and which evaporator tube comprises a first tube section which is arranged to absorb heat from the low temperature compartment, and at least a second tube section, which is arranged to absorb heat from the higher temperature compartment, and a heater arranged in said higher temperature storage compartment provided to apply heat to said higher temperature compartment.

The method is characterized in the steps of: starting said absorption refrigerating system if either the temperature in said higher temperature compartment is above said specified temperature range, or the temperature in said lower temperature compartment is above a higher freezer temperature threshold, and stopping said absorption refrigerating system if both the temperature in said higher temperature compartment is below said specified temperature range, and the temperature in said lower temperature compartment is below a lower freezer temperature threshold.

According to a preferred embodiment the application of heat in said higher temperature compartment is controlled in dependence of the temperature in said low temperature compartment and said lower and higher freezer temperature thresholds.

According to a preferred embodiment the method comprises the further steps of: applying heat to said higher temperature compartment if the temperature in said higher temperature compartment is below a first specified temperature, and stopping application of heat to said higher temperature compartment if the temperature in said higher temperature compartment is above a second specified temperature.

According to a preferred embodiment the method comprises the further step of: stopping application of heat to said higher temperature compartment if the temperature in said lower temperature compartment is below said lower freezer temperature threshold.

Further characteristics of the invention and advantages thereof will be evident from the following detailed description of embodiments of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will become more fully understood from the detailed description of embodiments of the present invention given herein below and the accompanying Figs. 1 to 4, which are given by way of illustration only, and thus are not limitative of the present invention.

Fig. 1 is a top elevation view, with parts of the walls broken away, of a refrigerator cabinet according to the present invention.

Figure 2 is a schematic block diagram of a refrigerator according to a preferred embodiment of the present invention.

Figure 3 is a schematic exemplary time diagram of the operation of a refrigerator according to a preferred embodiment of the present invention.

Figure 4 is a schematic exemplary time diagram of the operation of a refrigerator according to another preferred embodiment of the present invention.

PREFERRED EMBODIMENTS

10 In the following description, for purposes of explanation and not limitation, specific details are set forth, such as particular techniques and applications in order to provide a thorough understanding of the present invention. However, it will be apparent to one skilled in the art that the present invention may be practiced in other embodiments that depart from these specific details. In other instances, detailed descriptions of well-known methods and apparatuses are omitted so as not to obscure the description of the present invention with unnecessary details.

20 In the figures a side-by-side absorption refrigerator 100 is shown. The cabinet includes a rear wall 102, and two side walls 103, 104. A top-wall and a bottom-wall is also included but not shown in figure 1. These outer walls, together with two front doors 107, 108 enclose a low temperature storage compartment 109 and a higher temperature storage compartment 110. The outer walls and the front doors 107, 108 all include an outer and an inner shell between which heat-insulating material, such as polyurethane foam, is arranged. The two compartments 109, 110 are hermetically sealed from each other by a vertical partition wall 111, which extends perpendicular to and from the rear wall 102, between the rear wall 102 and

the front of the cabinet 100, in such away that the doors 107 and 108, when closed, sealingly rest against the front of the partition wall 111. The front door 107, the partition wall 111, the sidewall 103 and respective portions of the rear wall, top wall and bottom wall thus define the freezer compartment 109. The front door 108, the partition wall 111, the sidewall 104 and respective portions of the rear wall, top wall and bottom wall analogously define the higher temperature compartment 110. The partition wall is placed approximately 1/3 of the total width of the cabinet from one sidewall 103, so that the width-relationship between the freezer compartment 109 and the fridge compartment 110 is approximately 1:2.

During operation, the temperature in the freezer compartment 109 is normally kept at about -18°C , whereas the higher temperature compartment 110 normally is kept at about $+5^{\circ}\text{C}$. The higher temperature compartment 110 could also be referred to as a fridge compartment.

An absorption refrigerator system including a conventional boiler, condenser, and absorber (neither of which is shown in figure 1) is arranged at the back of the cabinet, outside the rear wall 102. The refrigerator system also includes an evaporator, generally indicated by reference number 120. The evaporator 120 is formed of an evaporator tube, which includes a first evaporator tube section 121 for cooling the freezer compartment 109 and a second evaporator tube section 122 for cooling the higher temperature compartment 110. The first section 121 is arranged inside the freezer compartment 109 and the second section 122 inside the higher temperature compartment 110 at a lower elevation than the first section so that cooling liquid may be transported from the first section 121 to the second section 122 by gravity.

Figure 2 is a schematic block diagram of the invention according to a preferred embodiment. An absorption refrigerator system is schematically disclosed and denoted 201. The refrigerator system 201 includes a conventional boiler, condenser, and absorber, as well as any other conventional technology for the operation of the refrigerator system 201, for instance valves and the like. A gas source 202, an AC-source 211 and a battery 203 are connected to the refrigerator system 201 in a conventional manner.

10 The battery 203 may be charged through mains 204 or through a connection to a generator on a combustion engine 205, for instance on a motor vehicle. During charging of the battery 203 the voltage level of the battery 203 is higher than when no charging occurs. A computer, or a control system 206,
15 measures the voltage level of the battery or alternatively detects if AC-power is available. The battery is further connected to a first heating element 207, provided on the first evaporator tube section 121, for providing power to the heating element 207 and to a second heating element 208,
20 provided on the second evaporator tube section 122, for providing power to the second heating element 208. The heating elements 207 and 208 are primarily provided to achieve automatic defrosting of the freezer compartment 109 and the higher temperature compartment 110, but the second heating element will provide additional functionality according to the
25 present invention as will be further described below.

The control system 206 is further connected to the refrigerator system 201 for controlling the start and stop of the refrigerator system 201 and to the first and second
30 heating elements 207 and 208 for controlling the application of heat to the freezer compartment 109 and the higher temperature compartment 110, respectively. A first

temperature-measuring device 209 is provided in the freezer compartment 109 for measuring the temperature in the freezer compartment 109 and is connected to the control system 206. A second temperature-measuring device 210 is provided in the higher temperature compartment 110 for measuring the temperature in the higher temperature compartment 110 and is also connected to the control system 206.

The operation of the refrigerator according to the invention will now be described in connection with figure 3.

Figure 3 is a schematic exemplary time diagram of the operation of a refrigerator according to a preferred embodiment of the invention. It should be noted that diagram in figure 3 is constructed to display the characteristic operation of the refrigerator according to the invention and should not be interpreted in a restrictive manner.

The control system 206 will operate the refrigerator system 201 according to two different schemes, depending on if the battery 203 is charged or not. The battery is charged if the refrigerator is connected to mains 204 or if the motor of the vehicle, in which the refrigerator is mounted, is running. This is detected by the control system by sensing the voltage across the battery. The voltage is higher across the battery 203 if the battery 203 is charged, than if not. Alternatively the control system may directly detect if AC-power is available, rather than to detect the voltage level over the battery.

Figure 3 shows charging of the battery with line 301. The control system 206 will keep the temperature in the freezer compartment and the higher temperature compartment 109 and 110, respectively, as measured with temperature measuring device 209 and 210, respectively, within defined tolerances.

This is achieved by setting cut-in 302 and cut-out 303 values for the start and stop of the refrigerating system 201, denoted cooler in figure 3. When the temperature in the higher temperature compartment 110 rises above the cut-in value 302 the refrigerating system, or cooler, 201 is started. When the temperature in the higher temperature compartment 110, as measured by the temperature measuring device 210, falls below the cut-out value 303 the refrigerating system 201 is stopped.

Since both the freezer compartment 109 and the higher temperature compartment 110 are cooled using a single refrigerating system 201 it is not possible to control the temperature in each compartment independently. Thus, the temperature in the freezer compartment 109 will depend upon the start and stop of the refrigerating system 201, as determined by the temperature in the higher temperature department 110.

Therefore, the control system 206 also monitors the temperature in the freezer compartment 109 and defines a cut-in 304 and a cut-out 305 value for application of heat in the higher temperature compartment 110. When the temperature in the freezer compartments 109 rises above the cut-in value 304 the control system 206 starts the heating element 210 in the higher temperature compartment 110, and when the temperature in the freezer compartment 109, as measured by the temperature measuring device 209, falls below the cut-out value 305 the control system 206 stops the heating element 210 in the higher temperature compartment 110.

In figure 3 the temperature in the higher temperature compartment 110 is shown by a line and is denoted 306 and the temperature in the freezer compartment 109 is shown by a line denoted 307. At time t_1 the temperature in the higher temperature compartment rises above the cooler cut-in valu

and the cooler 201 is started. After a slight delay the temperature in the higher temperature compartment 110 and in the freezer compartment 109 drops. At time t_2 the temperature in the high temperature compartment has fallen below the cooler cut-out value and the cooler is stopped. As can be seen in figure 3, the temperature in the refrigerator starts to rise after a short delay. The rise is more rapid in the freezer compartment 109 than in the high temperature compartment 110 and thus at time t_3 the temperature in the freezer compartment rises above the heater cut-in value. The control system 206 starts the heater in the high temperature compartment 110 and, as can be seen in figure 3, the temperature rise in the high temperature compartment 110 is sharper as an effect of the application of heat and at time t_4 the temperature in the high temperature compartment rises above the cooler cut-in value.

As can be seen in figure 3, the application of heat in the fridge compartment will make the temperature increase more rapid and thus reduce the time remaining before the cooler is started. When the cooler starts the temperature in the high temperature compartment 110 as well as the temperature in the freezer compartment 109 drops. At this period both the cooler, or refrigerating system, 201 and the heater in the high temperature compartment 110 are operational and thus the temperature in the high temperature compartment 110 is not dropping as rapid as during the previous phase when the cooler was operating. At time t_5 the temperature in the freezer compartment falls below the heater cut-out value and the heater in the high temperature compartment 110 is stopped. This have the effect of a more rapid drop in temperature in the high temperature compartment 110 and at time t_6 the temperature is below the cooler cut-out value and the cooler 201 is stopped.

At this time the control system 206 detects that the charging to the battery 203 has ceased. To save DC-energy, primarily by reducing the time the heater in the high temperature compartment 110 is operated, the heater cut-in and cut-out values 304 and 305, respectively, are raised, as is indicated in figure 3. Besides this the operation of the refrigerator is the same as has been described earlier. Thus, at time t_1 the temperature in the freezer compartment has risen above the new heater cut-in value 304 and the heater in the high temperature compartment 110 is started. At time t_2 the temperature in the high temperature compartment 110 is above the cooler cut-in value and the cooler 201 is started and at time t_3 the temperature in the freezer compartment 109 has drop below the new heater cut-out value and the heater in the high temperature compartment 110 is turned off.

Raising the heater cut-in and heater cut-out values when no charging is available to the battery 203 has the effect that the temperature in the freezer compartment is allowed be slightly higher than when charging is available. This will in turn mean that the heater in the high temperature compartment 110 is not operated as frequent and not as long when no charging is available, thus saving valuable battery power.

Figure 4 is a schematic exemplary time diagram of the operation of a refrigerator according to another preferred embodiment of the invention. It should be noted that diagram in figure 4 is constructed to display the characteristic operation of the refrigerator according to the invention and should not be interpreted in a restrictive manner.

In the embodiment disclosed in figure 4 the start and stop of the cooler 201 is determined based on the temperature in both the fridge compartment 109 and the freezer compartment 110. The start and stop of application of heat, by the heating

element 207, to the fridge is also determined based on the temperature in both compartments 109 and 110, respectively.

As in the previous embodiment different higher 404 and low r 405 freezer temperature thresholds are set depending on if the battery is charged as indicated with line 401 in figure 4. The specified fridge temperature range, as defined by higher fridge temperature threshold 402 and lower fridge temperature threshold 403, is kept constant as in the previous embodiment. The air temperature in the fridge compartment 110 is plotted and denoted 406 in figure 4, and the air temperature in the freezer compartment 109 is plotted and denoted 407 in figure 4.

At time t_1 the temperature in the fridge rises above the higher fridge threshold and thus the cooler 201 is started. This has the effect that the temperature in both compartments 109 and 110 drops as is indicated in figure 4. At time t_2 the temperature in the fridge compartment 110 has reached to lower fridge threshold, but since the freezer compartment 109 has not reached the lower freezer threshold the cooler is not stopped but heat is applied in the fridge by heating element 208.

Thus, the requirement for stopping the cooler 201 is that the temperature in both compartments 109 and 110 has reached respective lower temperature thresholds.

Since, in this embodiment, the heating power is somewhat higher than the cooling power in the fridge compartment the temperature in the fridge compartment will rise slowly as is indicated in figure 4.

At time t_3 the temperature in the freezer has reached the lower freezer threshold and the heating element 208 is switched off. Since the temperature in the fridge is below the lower fridge

threshold also the cooler is stopped. It should be noted that, even though the lower freezer threshold is used both to take decisions regarding to stop the cooler as well as to stop application of heat, it is possible to use separate threshold for these two decisions.

At time t_1 , the temperature in the freezer has reached the higher freezer threshold and the cooler is started. Thus, in general terms, the cooler is started if either the fridge temperature is above the higher fridge threshold, or if the temperature in the freezer reaches above the higher freezer threshold. Since the cooler is operating the temperature in both compartments drop. At time t_2 , the temperature in the fridge drops below the lower fridge threshold and the cooler is once again stopped. The temperature in the freezer has already passed the lower freezer threshold, but the requirement for stopping the cooler is that the temperature in both compartments should be below respective thresholds, which is fulfilled at time t_3 .

At time t_4 , the charging to the battery 401 ceases and thus are the freezer control values changed, that is the higher and lower freezer thresholds are increased.

The control of the start and stop of the cooler as well as start and stop of the heating element continues as before with the new freezer control values. Thus, at time t_5 , the fridge temperature reaches the higher fridge threshold and the cooler 201 is started. It is noted that the freezer temperature long before that passed the old higher freezer threshold, but since new thresholds apply the cooler 201 was not started.

At time t_6 , the heater is started. At time t_7 , the heater is switched off since the temperature in the freezer has reached the new low freezer threshold but the cooler is kept on since

the temperature in the fridge has had time to go over the low fridge threshold. At time t_{10} the temperature in both compartments are below respective thresholds so the cooler is stopped.

- 5 How fast the fridge and freezer absorbs heat from the environment and cools down when the cooler is running, that is, the inclinations of the temperature plots 406 and 407, is dependent on a number of different parameters, such as ambient temperature, the number of door openings, how much goods are
10 placed in the respective compartments etc.

It should be clear that the heater in the high temperature compartment 110 is not operating as a defrosting element in the present innovative application.

- 15 It will be obvious that the invention may be varied in a plurality of ways. Such variations are not to be regarded as a departure from the scope of the invention. All such modifications as would be obvious to one skilled in the art are intended to be included within the scope of the appended claims.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2

CLAIMS**1. Absorption refrigerator (1) including**

- a cabinet having outer walls (2, 3, 4, 5, 6) and at least one door (7, 8) encasing a low temperature storage compartment (9) and a higher temperature storage compartment (10), said compartments being separated by a partition wall (11),

- an absorption refrigerating system including an evaporator tube (20) in which a refrigeration medium flows from an upstream end to a downstream end of the evaporator tube, and which evaporator tube comprises a first tube section (21) which is arranged to absorb heat from the low temperature compartment, and at least a second tube section (22), which is arranged to absorb heat from the higher temperature compartment,

- a battery arranged to supply power to electronic equipment in said absorption refrigerating system,
- a control system arranged to control start and stop of said absorption refrigerating system to control the temperature in at least said higher temperature storage compartment to be within a specified temperature range, and

- a heater arranged in said higher temperature storage compartment provided to apply heat to said higher temperature compartment,

characterized in that,

- said control system comprises a sensor arranged to detect if said battery is currently charged or if AC-power is available,

- said control system is arranged to set freezer control values to a first set of freezer control values if said battery is charged or if AC-power is available and to a

second set of freezer control values if said battery is not charged or if AC-power is not available, where at least one of the values in said second set of freezer control values is higher than both values in said first set of freezer control values.

5

2. Absorption refrigerator according to claim 1, wherein
- said freezer control values are provided to control start and/or stop of said absorption refrigerating system.

10

3. Absorption refrigerator according to claim 1, wherein
- said freezer control values are provided to control application of heat in said higher temperature compartment.

15

4. Absorption refrigerator according to claim 1, wherein
- said freezer control values comprises a higher freezer temperature threshold and a lower freezer temperature threshold.

20

5. Absorption refrigerator according to claim 4, wherein said control system is provided to control the temperature in said higher and lower temperature compartments by:

- starting said absorption refrigerating system if either
 - the temperature in said higher temperature compartment is above said specified temperature range or
 - the temperature in said lower temperature compartment is above said higher freezer temperature threshold, and
- stopping said absorption refrigerating system if both
 - the temperature in said higher temperature compartment is below said specified temperature range, and

25

30

- the temperature in said lower temperature compartment is below said lower freezer temperature threshold.

6. Absorption refrigerator according to claim 1, wherein

5 - said control system is provided to control the temperature in said higher temperature storage compartment by starting said absorption refrigerating system if the temperature in said higher temperature storage department is above said specified temperature range and stop said absorption refrigerating system if
10 the temperature in said higher temperature storage department is below said specified temperature range.

7. Absorption refrigerator according to claim 1, wherein

15 - said control system is provided to apply heat to said higher temperature compartment if the temperature in said higher temperature compartment is below a first specified temperature and stop application of heat if the temperature in said higher temperature compartment rises above a second specified temperature.

20 8. Absorption refrigerator according to claim 4, wherein

 - said control system is provided to stop application of heat to said higher temperature compartment if the temperature in said lower temperature compartment is below said lower freezer temperature threshold.

25 9. Absorption refrigerator according to claim 1, wherein

 - said heater is powered by said battery.

10. Absorption refrigerator according to claim 1, wherein

 - said heater is also used for defrosting purposes.

11. Absorption refrigerator according to claim 2, wherein

30 - said first set of freezer control values comprises a

higher freezer temperature threshold in the range of -14° to -18° Celsius, preferably -16° Celsius, and a lower freezer temperature threshold in the range of -20° to -16° Celsius, preferably -18° Celsius, and

- 5 - said second set of freezer control values comprises a higher freezer temperature threshold in the range of -10° to -14° Celsius, preferably -12° Celsius, and a lower freezer temperature threshold in the range of -16° to -12° Celsius, preferably -14° Celsius.

- 10 12. Method for controlling the temperature in an absorption refrigerator (1), wherein said refrigerator includes
- 15 - a cabinet having outer walls (2, 3, 4, 5, 6) and at least one door (7, 8) encasing a low temperature storage compartment (9) and a higher temperature storage compartment (10), said compartments being separated by a partition wall (11),
- 20 - an absorption refrigerating system including an evaporator tube (20) in which a refrigeration medium flows from an upstream end to a downstream end of the evaporator tube, and which evaporator tube comprises a first tube section (21) which is arranged to absorb heat from the low temperature compartment, and at least a second tube section (22), which is arranged to absorb heat from the higher temperature compartment,
- 25 - a battery arranged to supply power to said absorption refrigerating system during at least part of the operating time for said absorption refrigerator, and
- 30 - a heater arranged in said higher temperature storage compartment provided to apply heat to said higher temperature compartment,
- characterized in the steps of,

- detecting if said battery is currently charged or if AC-power is available,
- setting freezer control values to a first set of freezer control values if said battery is charged or if AC-power is available, and
- setting said freezer control values to a second set of freezer control values if said battery is not charged or if AC-power is not available, wherein
- at least one of the values in said second set of freezer control values is higher than both values in said first set of freezer control values.

13. The method according to claim 12, comprising the step of:

- controlling start and/or stop of said absorption refrigerating system in dependence of the temperature in said low temperature compartment and said freezer control values.

14. The method according to claim 12, comprising the step of:

- controlling application of heat in said higher temperature compartment in dependence of the temperature in said low temperature compartment and said freezer control values.

15. The method according to claim 12, wherein

- said freezer control values comprises a higher freezer temperature threshold and a lower freezer temperature threshold.

16. The method according to claim 15, comprising the step of:

- starting said absorption refrigerating system if either
 - the temperature in said higher temperature

compartment is above a specified temperature range or

- the temperature in said lower temperature

compartment is above said higher freezer temperature threshold, and

- 5 - stopping said absorption refrigerating system if both

- the temperature in said higher temperature

compartment is below said specified temperature range, and

- the temperature in said lower temperature

- 10 compartment is below said lower freezer temperature threshold.

17. The method according to claim 12, comprising the steps of:

- controlling the temperature in said higher temperature

- 15 storage compartment by starting said absorption refrigerating system if the temperature in said higher temperature storage department is above a specified temperature range, and

- 20 - stopping said absorption refrigerating system if the temperature in said higher temperature storage department is below said specified temperature range.

18. The method according to claim 12, comprising the steps of:

- applying heat to said higher temperature compartment if the temperature in said higher temperature compartment is below a first specified temperature and

- stopping application of heat to said higher temperature compartment if the temperature in said higher temperature compartment is above a second specified temperature.

19. The method according to claim 15, comprising the step of:

- stopping application of heat to said higher temperature

compartment if the temperature in said lower temperature compartment is below said lower freezer temperature threshold.

20. Method for controlling the temperature in an

5 absorption refrigerator (1), wherein said refrigerator includes

- a cabinet having outer walls (2, 3, 4, 5, 6) and at least one door (7, 8) encasing a low temperature storage compartment (9) and a higher temperature storage
10 compartment (10); said compartments being separated by a partition wall (11),

- an absorption refrigerating system including an evaporator tube (20) in which a refrigeration medium flows from an upstream end to a downstream end of the
15 evaporator tube, and which evaporator tube comprises a first tube section (21) which is arranged to absorb heat from the low temperature compartment, and at least a second tube section (22), which is arranged to absorb heat from the higher temperature compartment, and

20 - a heater arranged in said higher temperature storage compartment provided to apply heat to said higher temperature compartment,

characterized in the steps of,

- starting said absorption refrigerating system if either

25 - the temperature in said higher temperature compartment is above said specified temperature range or

- the temperature in said lower temperature compartment is above a higher freezer temperature threshold, and

30 - stopping said absorption refrigerating system if both

- the temperature in said higher temperature compartment is below said specified temperature range, and

- the temperature in said lower temperature compartment is below a lower freezer temperature threshold.

21. The method according to claim 20, comprising the step
5 of:

- controlling application of heat in said higher temperature compartment in dependence of the temperature in said low temperature compartment and said lower and higher freezer temperature thresholds.

10 22. The method according to claim 20, comprising the steps of:

- applying heat to said higher temperature compartment if the temperature in said higher temperature compartment is below a first specified temperature and

15 - stopping application of heat to said higher temperature compartment if the temperature in said higher temperature compartment is above a second specified temperature.

23. The method according to claim 20, comprising the step
of:

20 - stopping application of heat to said higher temperature compartment if the temperature in said lower temperature compartment is below said lower freezer temperature threshold.


1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100


ABSTRACT


The present invention relates to an absorption refrigerator including a cabinet having outer walls and at least one door encasing a low temperature storage compartment and a higher temperature storage compartment, said compartments being separated by a partition wall, an absorption refrigerating system including an evaporator tube in which a refrigeration medium flows from an upstream end to a downstream end of the evaporator tube, and which evaporator tube comprises a first tube section which is arranged to absorb heat from the low temperature compartment, and at least a second tube section, which is arranged to absorb heat from the higher temperature compartment, a battery arranged to supply power to electronic equipment in said absorption refrigerating system, a control system arranged to control start and stop of said absorption refrigerating system to control the temperature in at least said higher temperature storage compartment to be within a specified temperature range, and a heater arranged in said higher temperature storage compartment provided to apply heat to said higher temperature compartment. The refrigerator is characterized in that said control system comprises a sensor arranged to detect if said battery is currently charged or if AC-power is available, and that said control system is arranged to set freezer control values to a first set of freezer control values if said battery is charged or if AC-power is available and to a second set of freezer control values if said battery is not charged or if AC-power is not available, where at least one of the values in said second set of freezer control values is higher than both values in said first set of freezer control values.

(Fig. 2)

Fig. 1

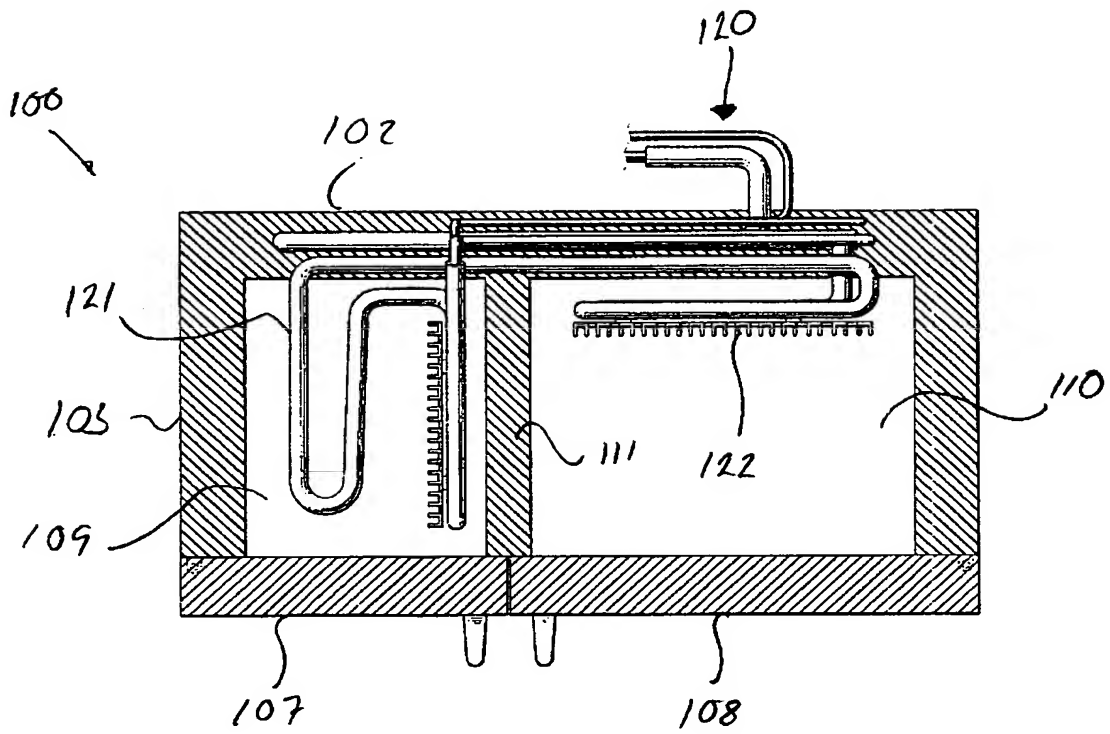

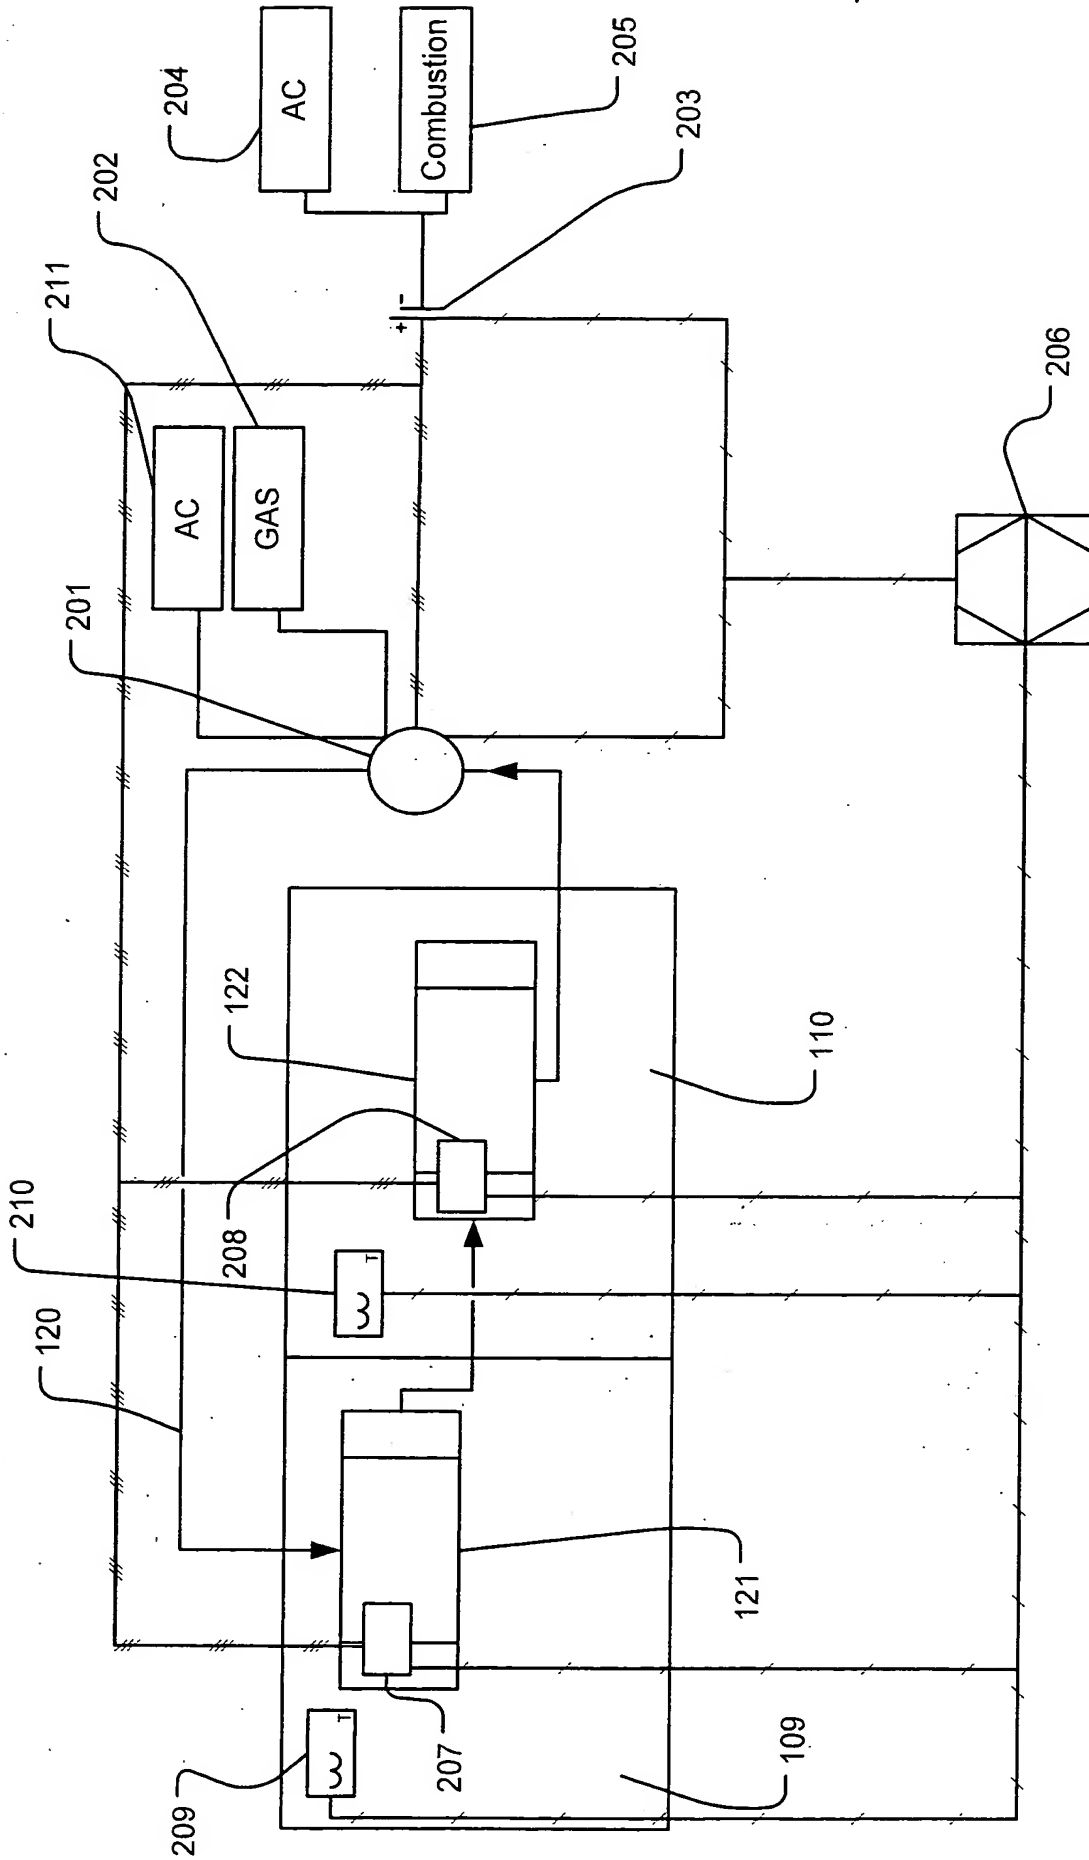

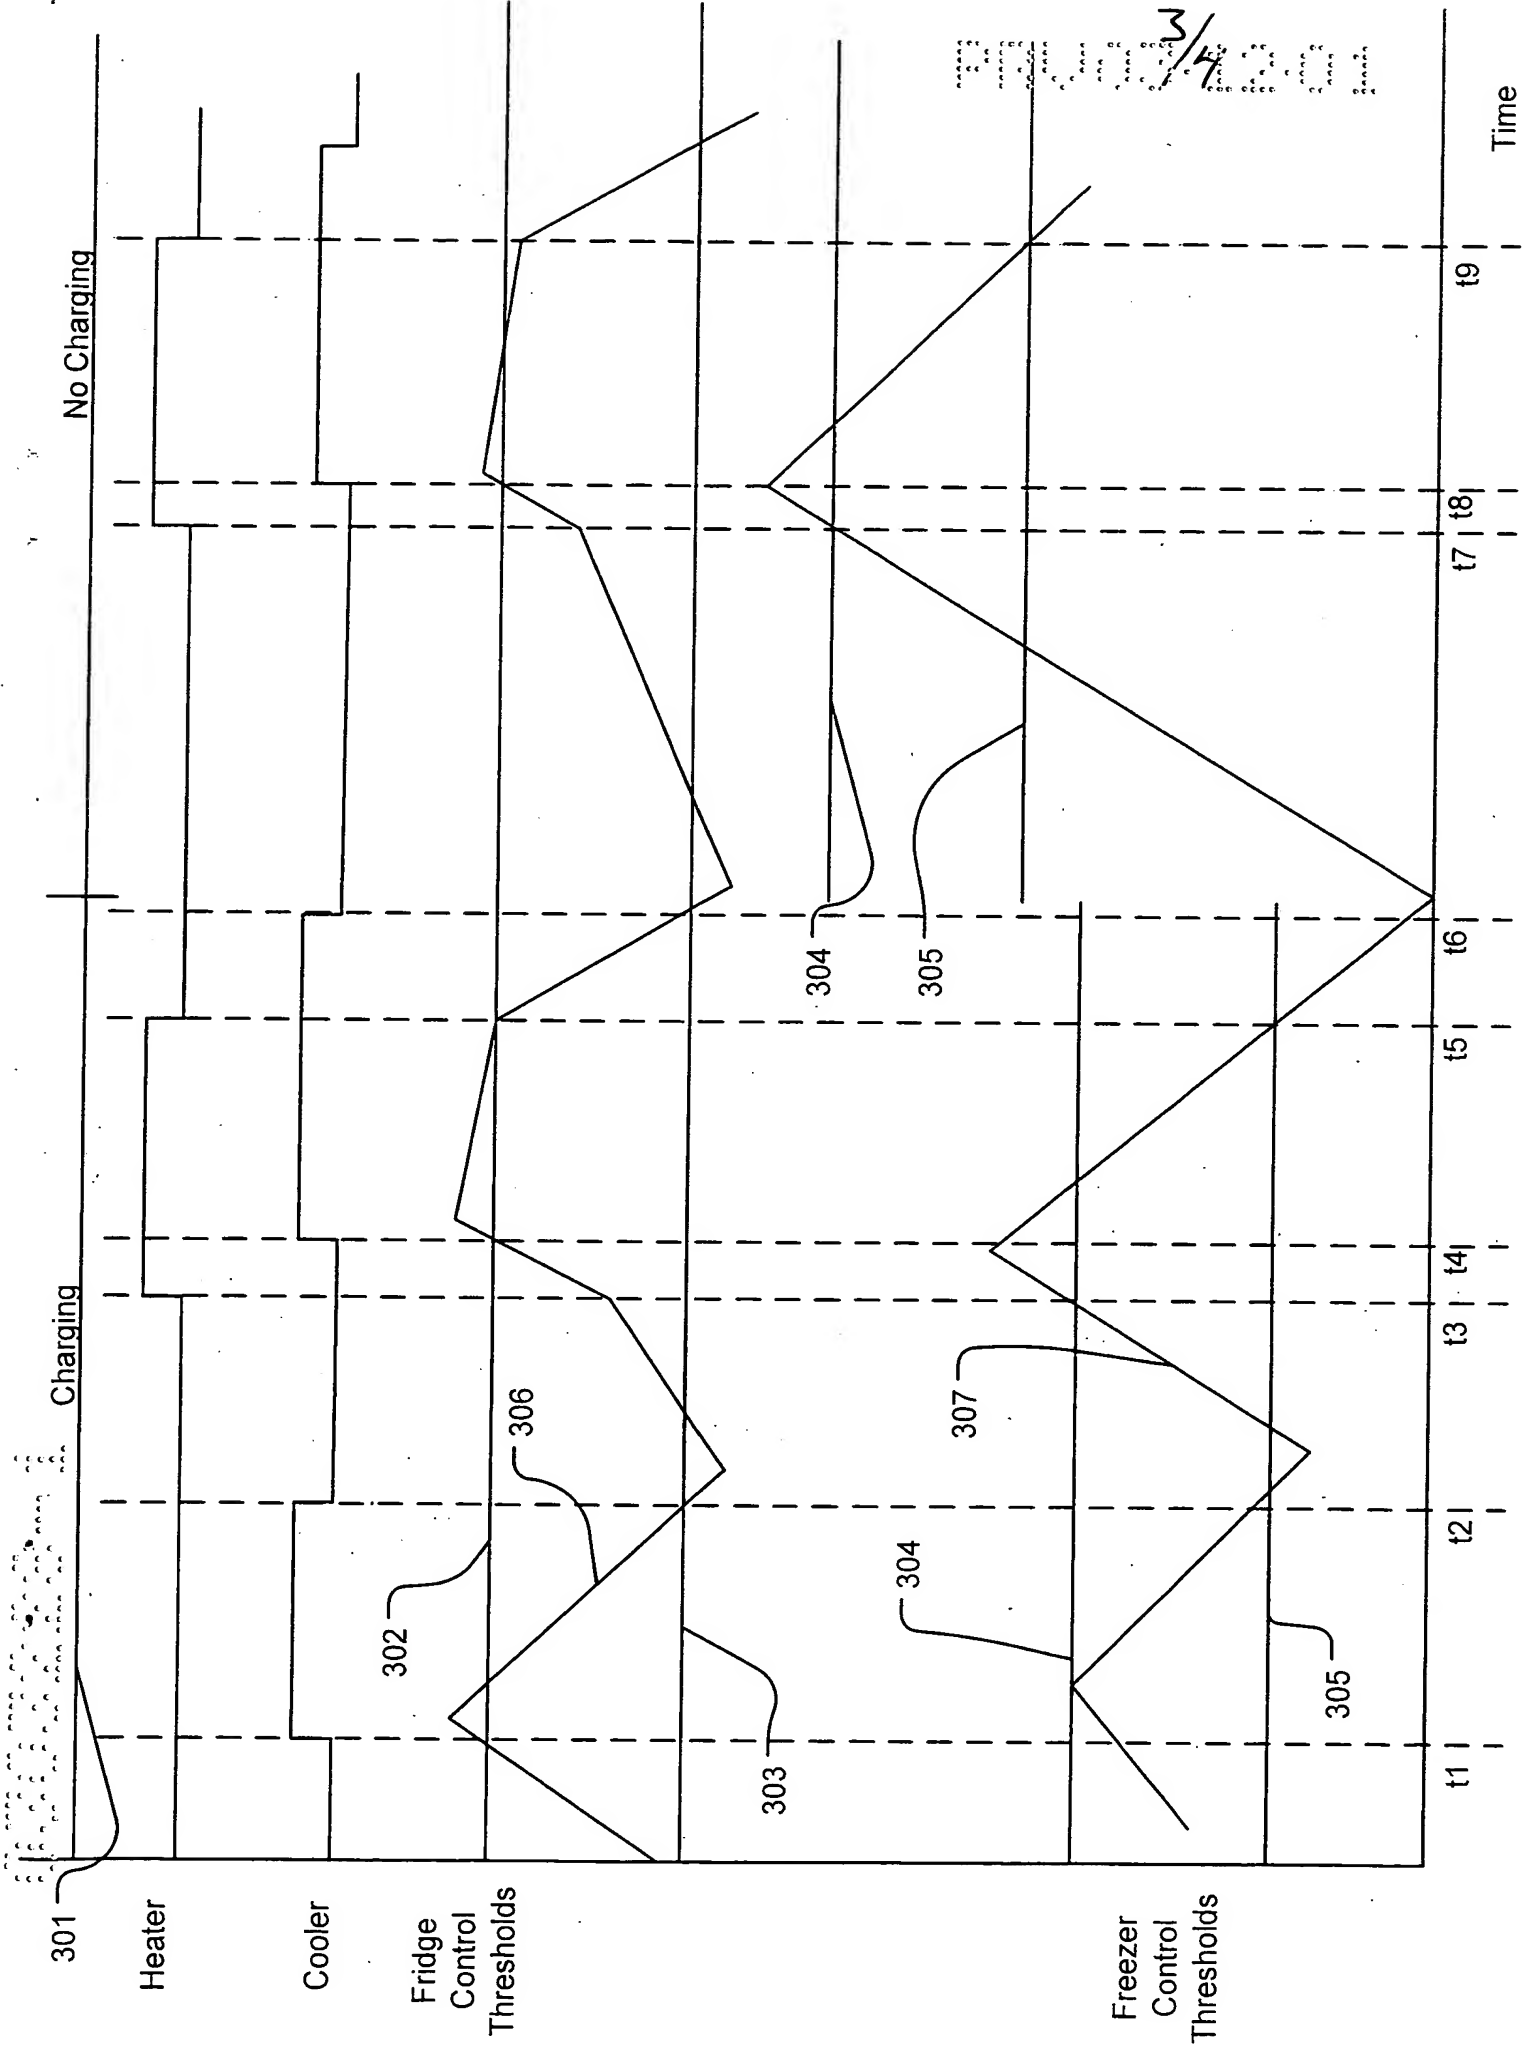

REV 3/4 2001

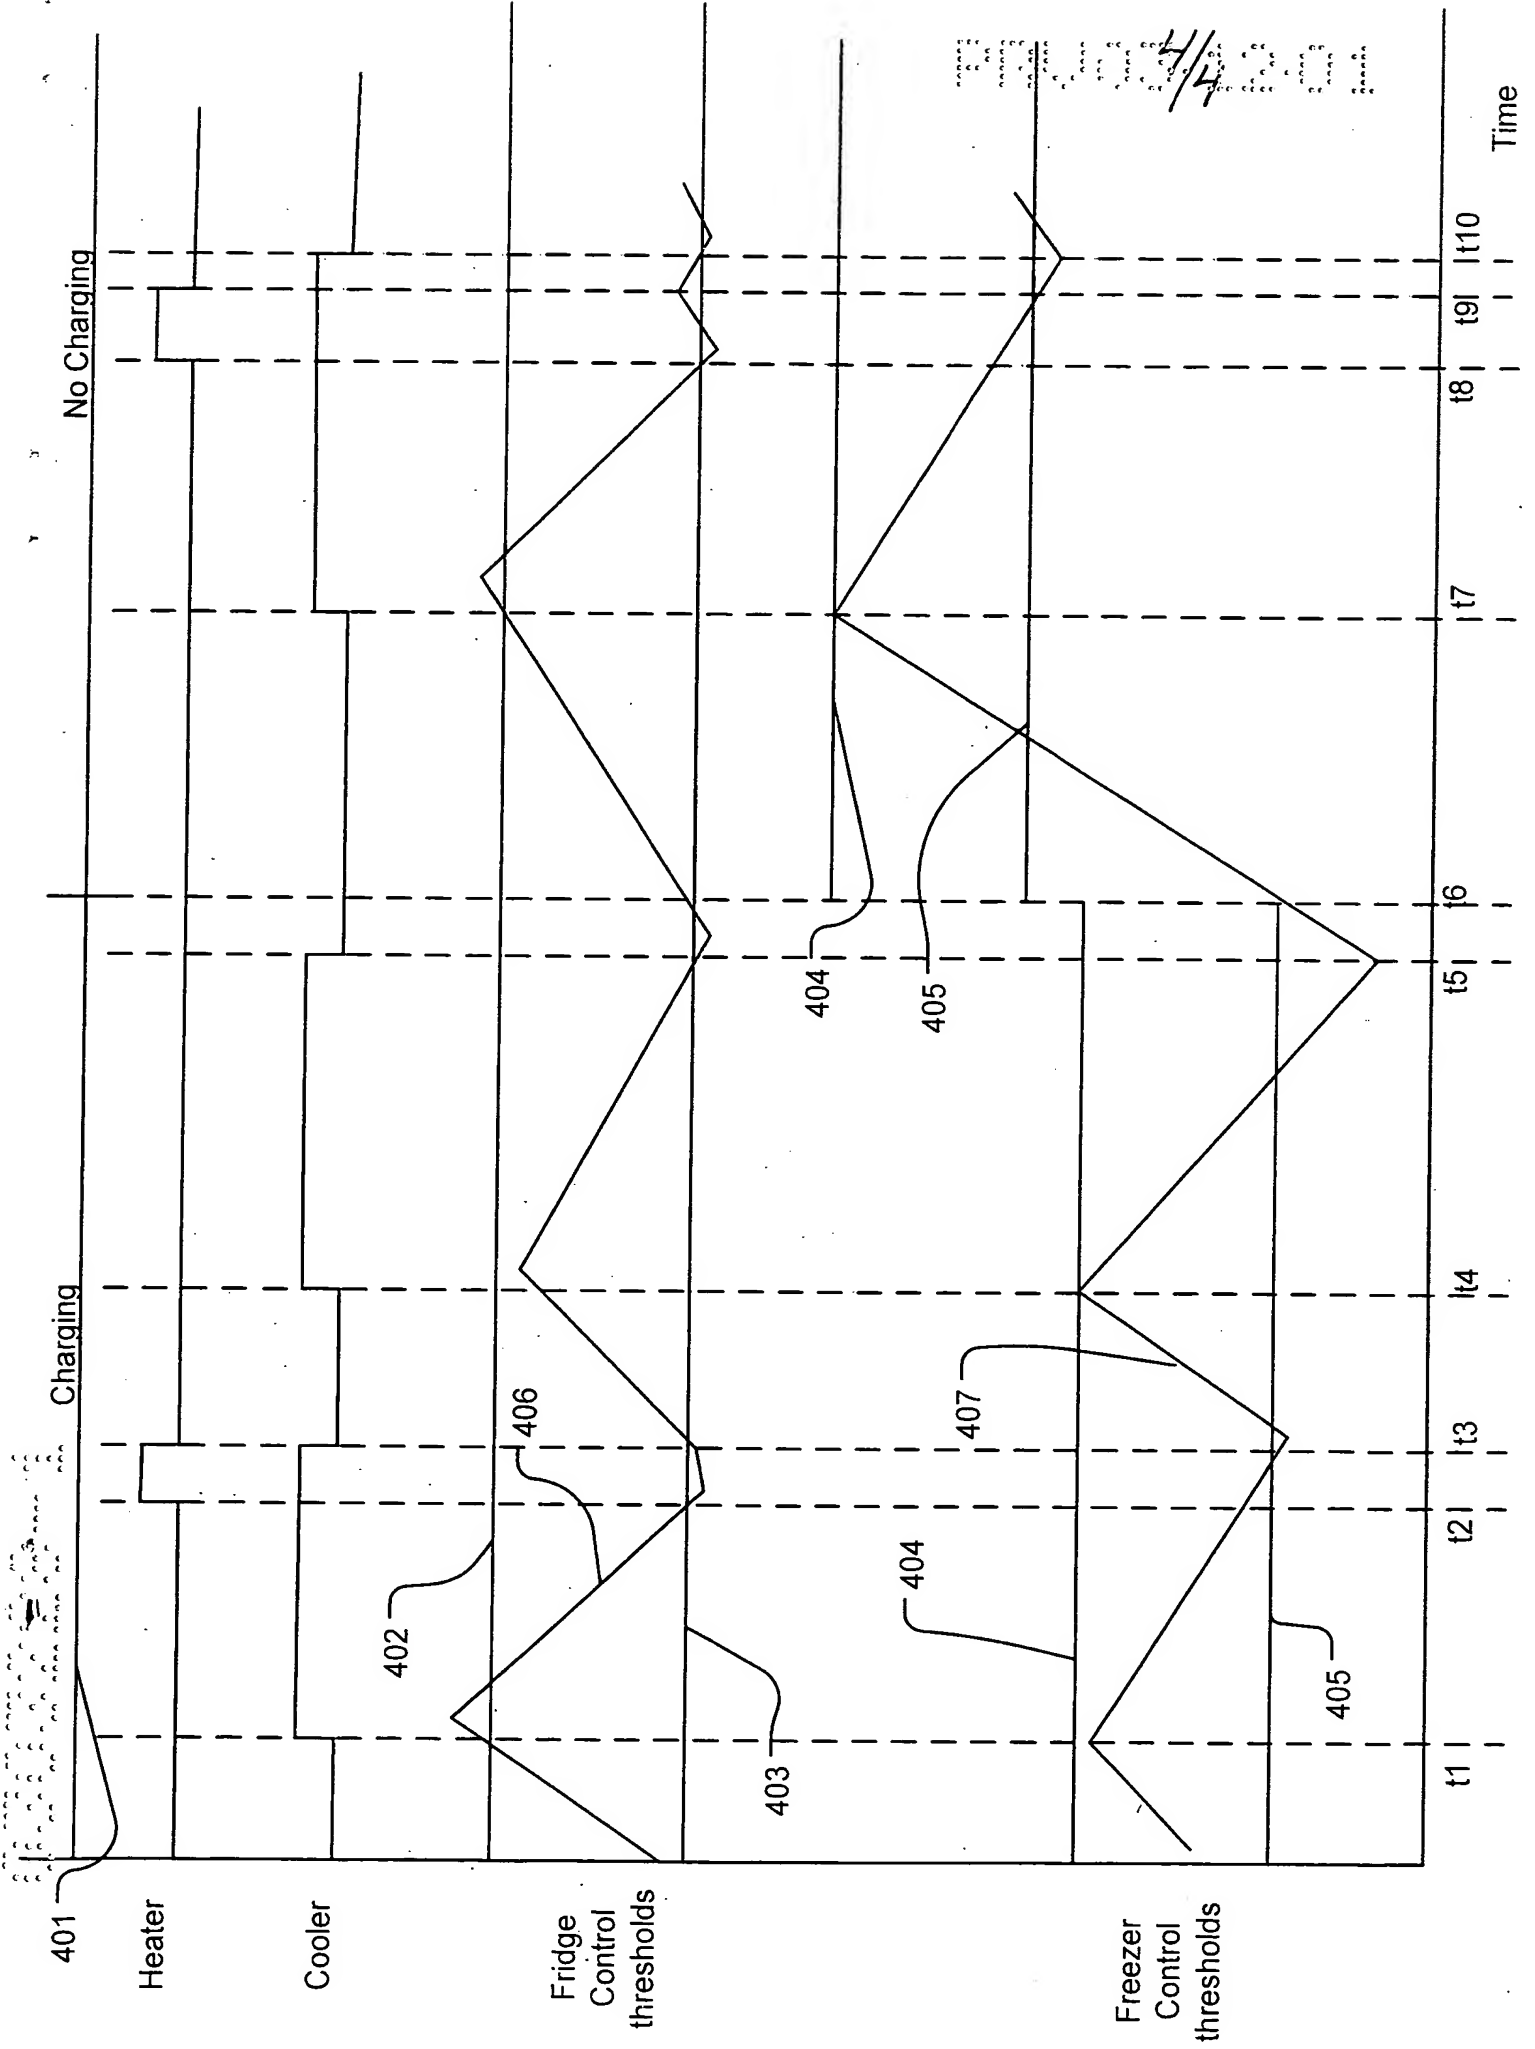


FIG. 4/4/201